


**RISCADO** Plane Elements 500 x 150 x 25 | Corners 275 x 150 x 30 x 25 Units: mm



Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

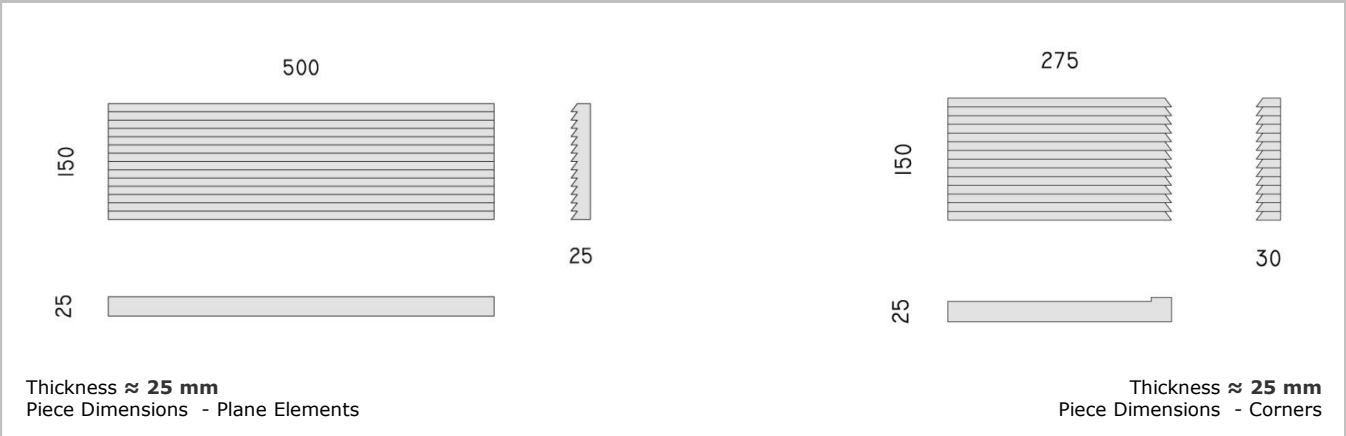

Product characteristics and package				Technical Specifications			
<b>Colors Available</b>	RC 09	RC 22	RC 23	RC 27	<b>Product Classification</b>	EN 14618	Concrete Coating
<b>Product Type</b>	<b>Flat Elements</b>		<b>Corners</b>	<b>Surface Quality</b>	EN 14617-16	Visual Inspection	
<b>Quantity per Pallet</b>	36 m <sup>2</sup>		72 lm	<b>Dimensions and Geometry</b>	EN 14617-16	Tolerances ± 5 mm	
<b>Quantity per Box</b>	0,60 m <sup>2</sup>		1,20 lm	<b>Maximum Water Absorption</b>	EN 14617-1	≤ 10 %	
<b>Items/m<sup>2</sup></b>	12,5 Units		7 Units	<b>Average Apparent Density</b>	EN 14617-1	1700 ±50kg/m <sup>3</sup>	
<b>Items/Box</b>	8 Units		8 Units 4 right / 4 Left	<b>Freeze/Thaw Resistance Flexural Strength</b> (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change	
<b>Boxes/Pallet</b>	60 Boxes		60 caixas	<b>Thermal Shock Resistance Flexural Strength</b> (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change	
<b>Average weight/m<sup>2</sup></b>	±31,6 kg		±10,8 kg	<b>Minimum Flexural Strength</b>	EN 14617-2	6 MPa	
<b>Average weight/Box</b>	±19 kg		±13 kg	<b>Compressive Strength Class Minimum Compressive Strength</b>	EN 206 EN 12390-3	LC30/33 ≥ 33 N/mm <sup>2</sup>	
<b>Average weight/Pallet</b>	±1170 kg With Pallet		±810 kg With Pallet	<b>Water Absorption by Capillary</b>	EN 772-11	≤ 1 g/(m <sup>2</sup> .s)	
<b>Approved:</b> Vitor Silva	<b>Elaborate:</b> Bruno Veloso			<b>PTDS n°:</b> RIS_001_EN	<b>Date:</b> 04   08   2016		